



# INSTRUCTION MANUAL

DELUXE PORTABLE AIR COOLER



# READ ENTIRE MANUAL BEFORE USE




Thank you for purchasing Chillwell™

We hope you **love** your new deluxe portable air cooler.

If you are not satisfied for any reason, please contact us directly.

[www.ChillWellFAQ.com](http://www.ChillWellFAQ.com)  
[ChillWell@rephelpdesk.com](mailto:ChillWell@rephelpdesk.com)

## WHAT'S INCLUDED

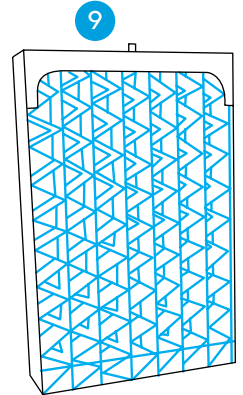
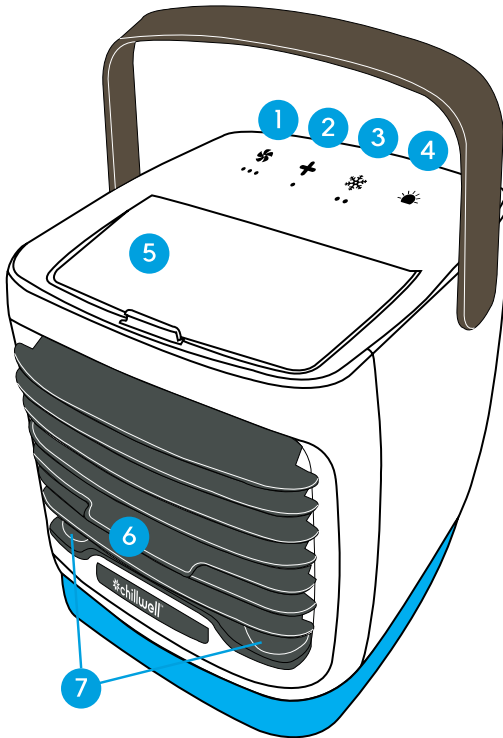


- |                                |   |                      |
|--------------------------------|---|----------------------|
| 1. On/Off Speed Control Button | 4. Light On/Off/ Color Selection Button | 7. Cooling Jets      |
| 2. Turbo Button                | 5. Water Tank Door                      | 8. USB Power Cord    |
| 3. Cooling Control Button      | 6. Multi-Directional Air Vent Tab       | 9. Cooling Cartridge |

# CHARGING



1. Place Chillwell™ on a flat surface such as a table or desk.
2. Insert USB-C end of Power Cord into Power Adapter Port on the back of the unit.
3. Plug large USB end of the Power Cord into a USB Power Adapter (minimum 7.5 W, not included) or USB Port in a laptop, or other device.
4. The red indicator light will be on when Chillwell™ is charging. When fully charged, Chillwell™ will turn to green indicator light.

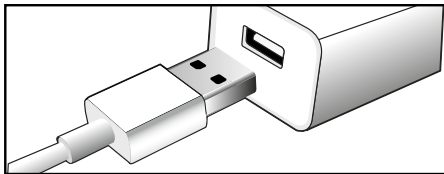
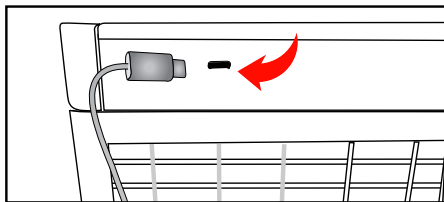


# SETUP




1. Place Chillwell™ on a flat surface.
2. Pour cold water directly into the fill area slowly. The colder the better. The Cooling Cartridge will become soaked as you fill. Do not fill past the MAX FILL line on the water tank.

**NOTE:** Do not over fill Water Tank or fill while Chillwell™ is running.

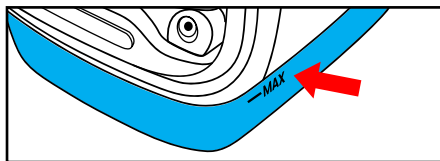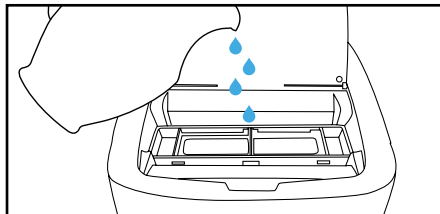




# USAGE









1. Press  On/Off Speed Control Button to turn Chillwell™ on. It defaults to High speed mode.
  - 1<sup>st</sup> press: Power on, High
  - 2<sup>nd</sup> press: Medium
  - 3<sup>rd</sup> press: Low
  - 4<sup>th</sup> press: Power off

**NOTE:** Chillwell™ will run up to 2.5 hours on High, and 8 hours on Low on a single fill.

2. Press  Turbo Button to turn maximum cooling power on or off.
3. Press  Cooling Control Button to choose from high, low or off.

4. Press  Light On/Off Button to select light color. Choose between Teal, Red, White, Blue, Purple, Yellow, Green or Color Cycle Mode.

**NOTE:** To adjust brightness, hold  button for 3 seconds. Light will begin to get brighter and dimmer. When at your desired level, press  button again to lock in choice.

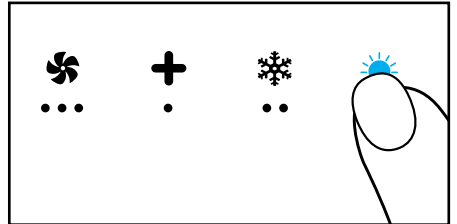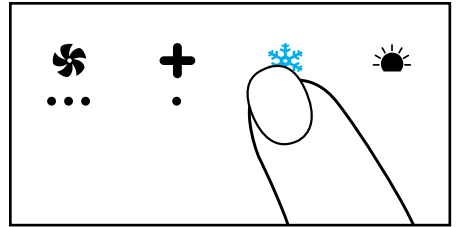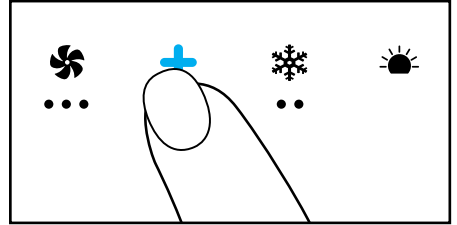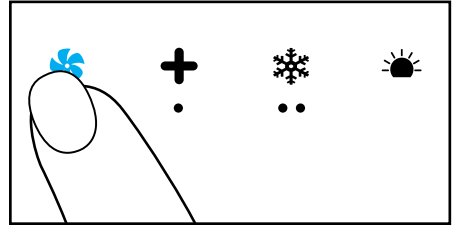


## USAGE (CONT.)



5. Use Multi-Directional Air Vent Tab to adjust airflow up or down.

*PLEASE NOTE: If condensation forms on vents it will drip back in to Water Tank. Do not place objects in front of running unit or condensation could form.*

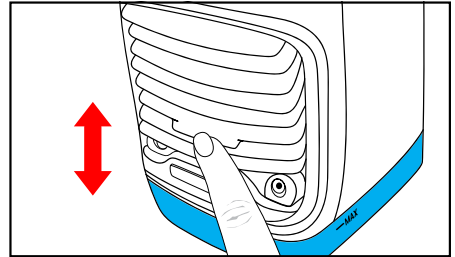


**IMPORTANT:** If you do not plan on using Chillwell™ for an extended period of time, we recommend you empty Chillwell™ and let unit and Cooling Cartridge dry before storing. This will help avoid mold, unpleasant smells, and prolong life of Chillwell™ and Cooling Cartridge.

## MAINTENANCE



### UNIT CLEANING

1. To prepare for cleaning, run Chillwell™ until Water Tank is empty or hold unit over a sink and carefully pour out water.
2. Remove Cooling Cartridge from Chillwell™. Using a damp cloth, clean Water Tank and Air Vents. If necessary, a small, bendable brush (i.e. toothbrush, bottle brush, straw brush, etc) can be used to clean the inside of Water Tank. Rinse clean with warm water and air dry.

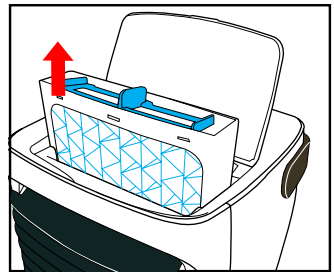


# MAINTENANCE (CONT.)



## COOLING CARTRIDGE CLEANING

Hand wash Cooling Cartridge with soap and warm running water. Shake out excess water and let air dry.

**IMPORTANT:** If you see mold on Cooling Cartridge or notice a musty smell, stop and clean it before further use. Fully submerge Cooling Cartridge in a pot or bowl filled with equal parts clean water and white vinegar. Allow to soak for 45-60 minutes then rinse with warm water and let air dry.

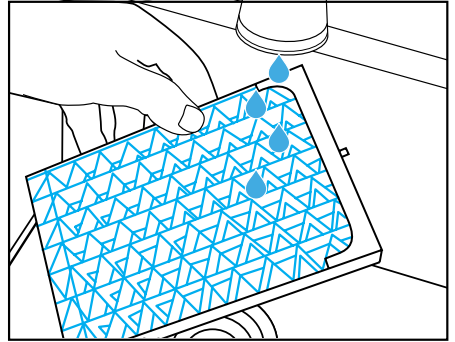

**NOTE:** To keep your Chillwell™ in the best working condition, we recommend weekly cleaning of Chillwell™ and Cooling Cartridge and replacing Cooling Cartridge every 1-3 months.

To Order A New  
Cooling Cartridge:



Web: [www.ChillWellCartridge.com](http://www.ChillWellCartridge.com)



Email: [ChillWell@rephelpdesk.com](mailto:ChillWell@rephelpdesk.com)

# WARNINGS



- Do not carry Chillwell™ when filled with water.
- Use only clean water. You can use distilled water, if desired.
- Please read and follow regular maintenance as recommended in "Maintenance" section of this guide.
- Chillwell™ works best in non-polluted areas. Large dust or dirt particles may reduce lifetime of unit.
- We recommend use only in dry locations. If using in a moist area or environment, take care not to get water on external areas of the product.
- If a leak or spill occurs on the surface of device, turn Off Chillwell™ and let it dry for 24 hours. Then, use as normal.
- Do not place in direct sunlight for extended periods of time.


# WARNINGS




- When not in use for an extended period of time, empty Water Tank, turn unit on and set to High fan speed for at least 4 hours. This will dry out Cooling Cartridge and inside of unit for proper storage.
- Only use original USB Power Cord supplied in package.
- Do not touch power supply or USB Power Cord with wet hands.
- Turn Off and make sure Chillwell™ is fully powered off when cleaning, removing or replacing Cooling Cartridge or when moving device.
- For best results, place Chillwell™ on a higher surface like a table or countertop.
- Do not place Chillwell™ near a heater or any electrical equipment.
- Do not place Chillwell™ in passageways or high traffic areas where there is a possibility of tipping or knocking it over.
- Do not allow any foreign objects inside Chillwell™.
- Do not place items on top Chillwell™.
- Do not block the front vents and back grills of Chillwell™.
- Do not turn Chillwell™ upside down.
- Do not submerge Chillwell™ under water or other liquids.
- Do not place Chillwell™ near open flames or fire sources.
- People with limited physical, visual or mental abilities or lacking proper experience and/or knowledge should never use Chillwell™ without supervision of those responsible for their safety or those capable of assistance in using the device.
- The manufacturer does not bear any responsibility for any damage from failure to comply with this product guide.
- A replaceable Cooling Cartridge is designed specifically for this product. If your Cooling Cartridge has been broken or damaged, you can purchase a replacement.

CHILLWELL™ ASSUMES NO RESPONSIBILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF YOUR USE OF THE PRODUCT. IN PURCHASING AND USING THIS PRODUCT, YOU ASSUME ALL RESPONSIBILITY FOR CLEANING THE PRODUCT AND MONITORING THE PRODUCT FOR MOLD. ADDITIONALLY, CHILLWELL™ SPECIFICALLY DISCLAIMS ALL EXPRESSED WARRANTIES NOT OTHERWISE SET FORTH HEREIN AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THERE ARE NO WARRANTIES WHICH EXTEND BEYOND THE DESCRIPTION OF THE FACE HEREOF.


## FOR BEST RESULTS

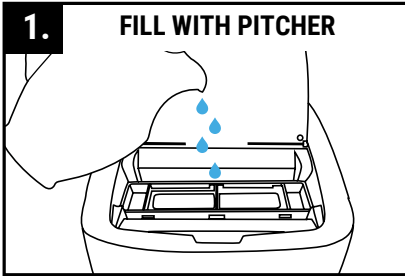

Pour cold water directly into the fill area slowly. The colder the better. The Cooling Cartridge will become soaked as you fill. Pay attention to the **MAX FILL** line on the water tank.

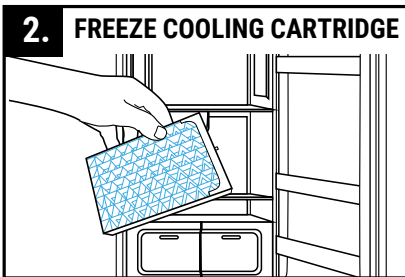


For the best cooling, wet the Cooling Cartridge and place in your freezer before use. Cooling Cartridge takes about 1 hour to freeze.

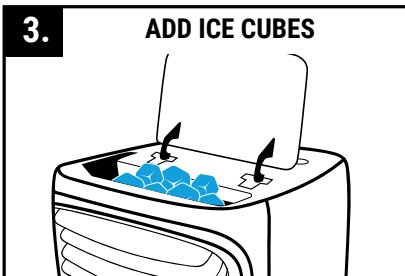

Remove the Cooling Cartridge and place a few ice cubes inside as shown. They will drop into the tank to super-cool the water. Only a few cubes are needed.

## FOR HOUSEHOLD USE ONLY

Made In China  
U.S. Pat. No. 10,712,029  
CW-IM-02-0323

  
Model Number: **18009**  
**AC100~120V**  
**DC 5V, 1.5-2.0A**  
**1217.0101**